

# ELI-ACVIQ-B5-312MR: Specifications


## 5mp HD Analog Bullet HDCVI | HDTVI | AHD | 960H



### Key Features:

- 5MP@20fps/ 4MP@30fps image HD Over Coax
- AHD / TVI / CVI / CVBS switchable
- True WDR
- Auto color to B / W at low illumination
- ICR switch, true day / night
- Noise Reduction
- IR night vision distance up to 32 - 65 feet
- IP66 Rated weatherproof

### Dimensions:

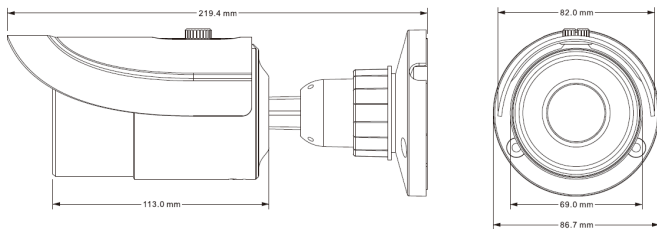

Model#: ELI-ACVIQ-B5-312MR	
<b>Camera</b>	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP/4MP
Image Size	2592 x 1944
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 25s ~ 1 / 100000s ( PAL ); 1 / 30s ~ 1 / 100000s ( NTSC )
IR Distance	10 ~ 20 m
Frame Rate	5MP @20fps/4MP@30fps
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.6 mm ( 2.8 mm optional )
Lens Mount	M12
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP66
<b>Functions</b>	
Function Control	OSD ( COC Control )
Day & Night	ICR
WDR	Yes (120dB)
Digital NR	Yes ( 2D DNR )
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Edge Brightness Compensation	Yes
Defogging	Yes
HLC	Yes
Sharpness	Yes
Mirror Image	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
Language	English and Chinese
Angle Adjustment	Any angle
<b>Other</b>	
Power Supply	DC12V ( ± 10% )
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions ( mm )	φ 70 x 156