

ELI-ACVIQ-VD5-312MR: Specifications



5mp HD Analog Vari-focal Vandal Dome HDCVI | HDTVI | AHD | 960H



Key Features:

- 5MP@20fps/ 4MP@30fps image HD Over Coax
- AHD / TVI / CVI / CVBS switchable
- True WDR
- Auto color to B / W at low illumination
- ICR switch, true day / night
- Noise Reduction
- IR night vision distance up to 65 - 98 feet
- IP66 & IK10 Ingress Protection

Dimensions:

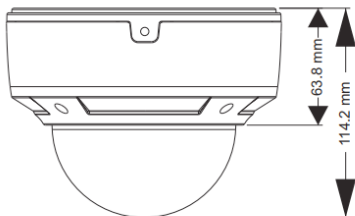

Model#: ELI-ACVIQ-VD5-312MR	
Camera	
Image Sensor	1 / 2.5 "CMOS
Resolution	5MP/4MP
Image Size	2592 x 1944
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 25s ~ 1 / 100000s (PAL); 1 / 30s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	5MP @20fps/4MP@30fps
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.3 ~ 12 mm
Lens Mount	D14
Lens Adjustment	OSD adjustment
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP66, IK10
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
WDR	Yes (120dB)
Digital NR	Yes (2D DNR)
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Edge Brightness Compensation	Yes
Defogging	Yes
HLC	Yes
Sharpness	Yes
Mirror Image	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto / Manual
Language	English and Chinese
Angle Adjustment	Any angle
Other	
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 3.5W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	φ 150 x 114

Specification Subject to change without Notice*

eLineTechnology.com

800.683.6835 | sales@el-usa.com

Become a Business Partner ask us how?

0 3 2 3