

ELI-QUIP-ED2-28RE: Specifications


2mp IP Network Eyeball dome Weatherproof with IR



Key Features:

- 2 Mega Pixel 1080P (1920 x 1080)
- Max. Resolution: 1920 x 1080
- ICR auto switch, true day / night
- 33 ~ 66 feet IR night view distance
- 3D DNR, digital WDR
- ROI coding
- Supports PoE power supply
- Supports smart phone, iPad, remote monitoring
- Supports three streams

Dimensions:

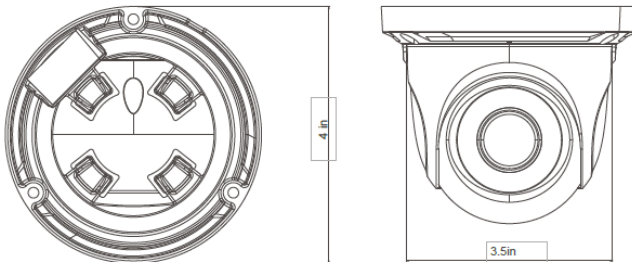

Compatible Camera Mounts:

Round Mount: JB-SB-BR

Wall Mount: WB-SB-ED

Model#: ELI-QUIP-ED2-28RE	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Auto Iris	Fixed Iris
Min. Illumination	0.1 lux @F1.2,AGC ON; 0 lux with IR
Lens	2.8mm
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any Angle
Image	
Video Compression	H.264 / MJPEG Baseline Profile / Main Profile / High Profile
Resolution	1080P (1920x1080),720P (1280x720) D1,CIF(480x240)
Main stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit rate	256Kbps ~ 5Mbps
Encode Mode	VBR / CBR
Quality	Five levels under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. Adjustable through client software or web browser
ROI	3 ROI
Interfaces	
Network	RJ45
Functions	
Remote Monitoring	IE browsing,CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Protocol	TCP / IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP,FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion Alarm
PoE	Yes
IR Distance	33-66ft (10-20m)
Water-proof	IP66
Other	
Power Supply	DC 12V / PoE
Power Consumption	< 2W
IR Consumption ON	< 4W
Operating Environment	- 20 °C ~ 50 °C,10 % ~ 90 % humidity
Dimensions	ø 3.5in x 4in (ø 87mm x 108mm)
Weight (net)	369g (1lbs)
Installation	Wall mounting, pendent mounting

eLineTechnology.com

800.683.6835 | sales@el-usa.com

Become a Business Partner ask us how?