

# ELI-ACVIQ-B2-S4R: Specifications


2mp Starligh HD Coax Bullet HDCVI | HDTVI | AHD | 960H



## Key Features:

- 2MP (1920 x 1080p) HD Over Coax
- AHD / TVI / CVI / CVBS switchable
- Starlight, WDR, 3D DNR
- Auto color to B / W at low illumination
- ICR switch, true day / night
- Noise Reduction
- IR night vision distance up to 32 - 65 feet
- IP66 Rated weatherproof

## Dimensions:

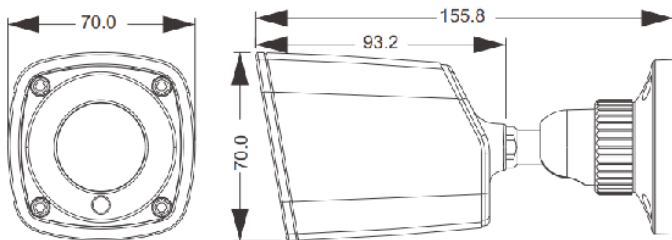

Model #: ELI-ACVIQ-B2-S4R	
<b>Camera</b>	
Image Sensor	1 / 2.8 "CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s ( PAL ); 1 / 60s ~ 1 / 100000s ( NTSC )
IR Distance	10 ~ 20 m
Frame Rate	30fps ( 60Hz ), 25fps ( 50Hz )
Min. Illumination	Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	3.6 mm
Lens Mount	M12
S / N Ratio	≥52dB ( AGC OFF )
Ingress Protection	IP66
<b>Functions</b>	
Function Control	OSD ( COC Control )
Day & Night	ICR
WDR	Yes (120dB)
Digital NR	Yes
Global Exposure	Yes
Central Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	Yes
Sharpness	Yes
Smart IR	Yes
Defogging	Yes
HLC	Yes
Image Setting	Yes
Defect Correction	Auto
Language	13 different languages
Angle Adjustment	Any angle
<b>Other</b>	
Power Supply	DC12V ( ± 10% )
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions ( mm )	φ 70 x 156

eLineTechnology.com

800.683.6835 | sales@el-usa.com

Become a Business Partner ask us how?

Specification Subject to change without Notice\*